


- △ 1 CIRCUIT IDENTIFICATION NUMBERS LOCATED AS SHOWN.
 △ 2 SPACER AND CPA (OPTIONAL) ARE SHIPPED IN PRE-ASSEMBLED POSITION.
 △ 3 PART NUMBER, DATE CODE AND WORK CENTER LOCATION .
 △ 4 CAVITY ID.
 △ 5 MATERIAL IDENTIFICATION.
 △ 6 KEYING OPTION B NOT PREFERRED FOR NEW APPLICATIONS.
 7. PACKAGING: CONNECTOR ASSEMBLIES BULK PACKED IN CARDBOARD BOXES.
 △ 8 OPTIONAL CORE SLOTS FOR MOLD CONSTRUCTION.
 9. SPACER IS SHIPPED IN PRE-LOADED POSITION. SOME SPACERS MAY BECOME FULLY SEATED DURING SHIPPING. USE TE INSTRUCTION SHEET 408-10104 TO REPOSITION SPACER BACK TO IT'S PRE-LOADED POSITION.
 10. REFER TO TE INSTRUCTION SHEET 408-8599 FOR PROPER CONTACT ASSEMBLY/DISASSEMBLY AND CONNECTOR MATING/ UN-MATING PROCEDURE.

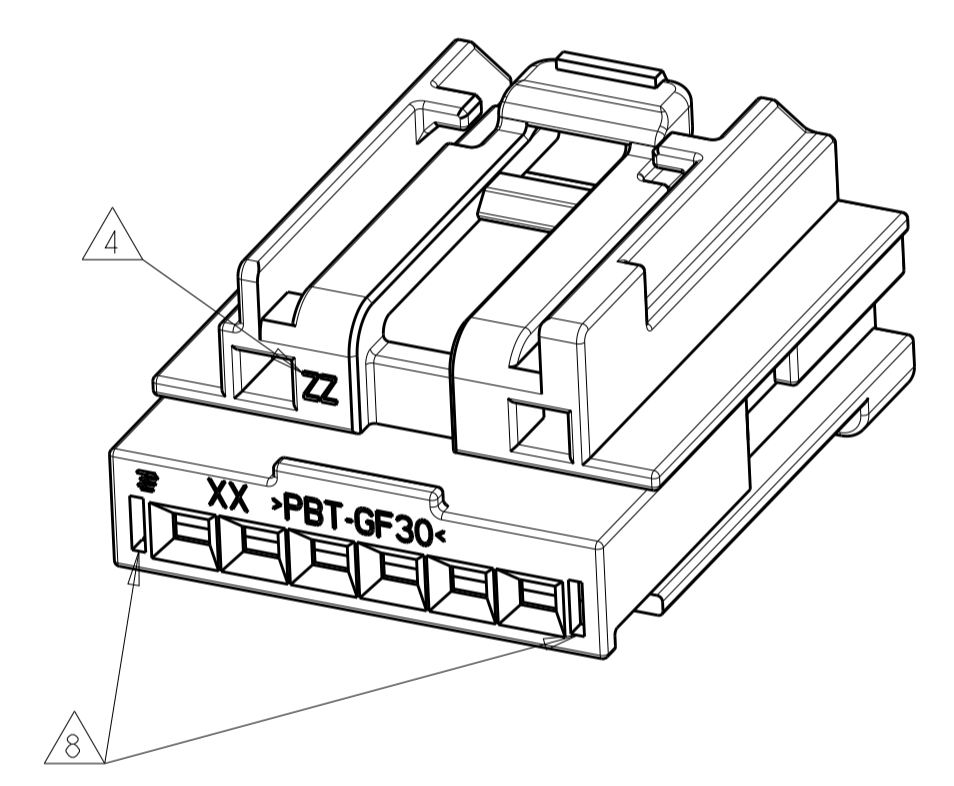

SCALE 4:1

| 1-1456985-0 | | | | | | | | | | <----- ASSEMBLY PN | | | | |
|--------------------|----------------|-------------|-------|---------|---|--|--|--|--|----------------------------|--|--|--|--|
| QTY REQ'D PER ASSY | DESCRIPTION | MATERIAL | COLOR | ITEM NO | REVISION OF EACH ASSY NO (WHEN BLANK, USE DWG REVISION) | | | | | WEIGHT OF EACH ASSY NO (g) | | | | |
| 1 | CPA | >PBT-GF20< | RED | 3 | | | | | | | | | | |
| 1 | SPACER | >PBT-GF30< | RED | 2 | | | | | | | | | | |
| 1 | HOUSING; KEY F | >PA66-GF35< | BLACK | 1 | | | | | | | | | | |
| - | HOUSING; KEY E | >PA66-GF35< | BLACK | 1 | | | | | | | | | | |
| - | HOUSING; KEY D | >PA66-GF35< | BLACK | 1 | | | | | | | | | | |
| - | HOUSING; KEY C | >PA66-GF35< | BLACK | 1 | | | | | | | | | | |
| - | HOUSING; KEY B | >PA66-GF35< | BLACK | 1 | | | | | | | | | | |
| | DESCRIPTION | MATERIAL | COLOR | ITEM NO | | | | | | | | | | |

PARTS LIST

THIS DRAWING IS A CONTROLLED DOCUMENT.


STE TE Connectivity

ASSEMBLY, 1X6 POSITION, GET, FEMALE, UNSEALED

SCALE 5:1 SHEET 1 OF 2 REV D3


| REVISIONS | | | | |
|-----------|-----|-------------|------|------|
| P. | LTH | DESCRIPTION | DATE | APVD |
| - | - | SEE SHEET 1 | - | - |
| | | | | |
| | | | | |

KEYING OPTION B

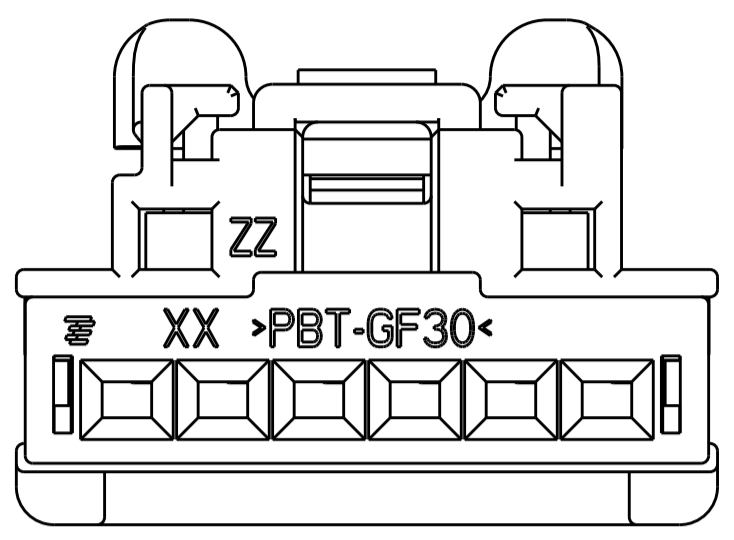

(SHOWN WITH CPA)


KEYING OPTION B

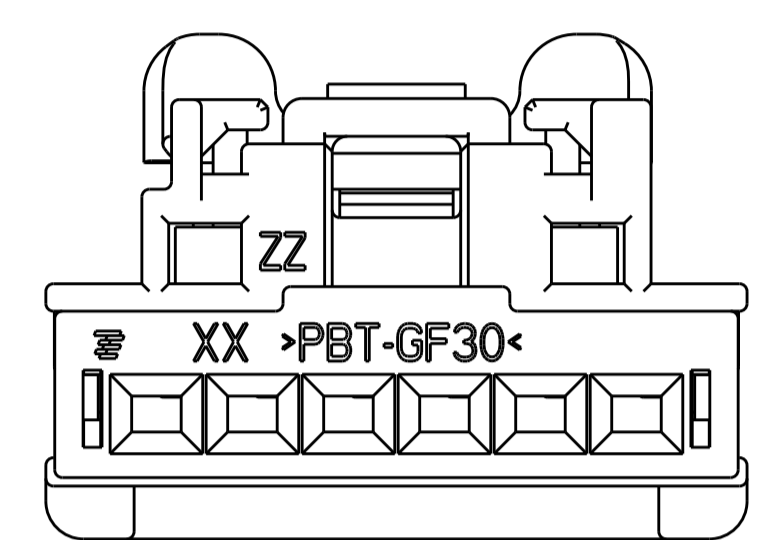

(SHOWN WITH CPA)



SCALE 2:1

KEYING OPTION C

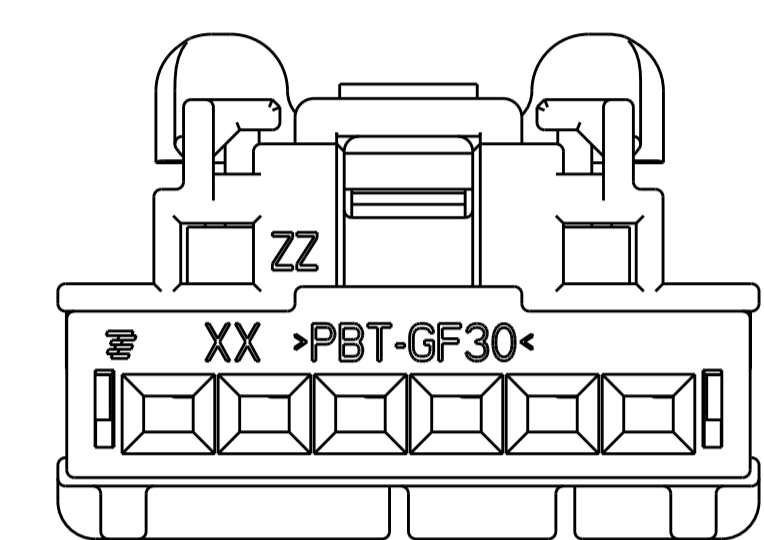


(SHOWN WITH CPA)

SCALE 2:1

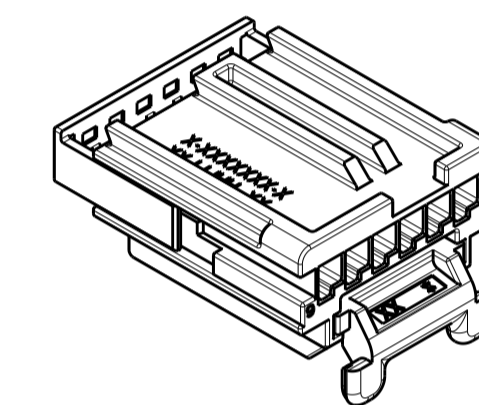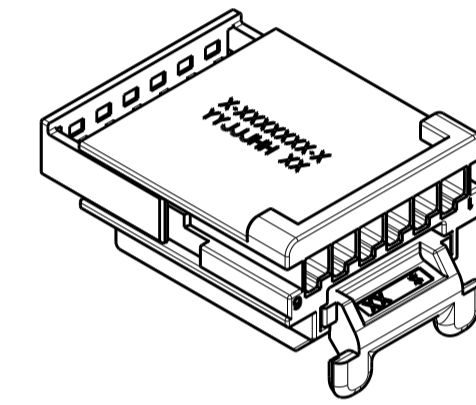


KEYING OPTION D

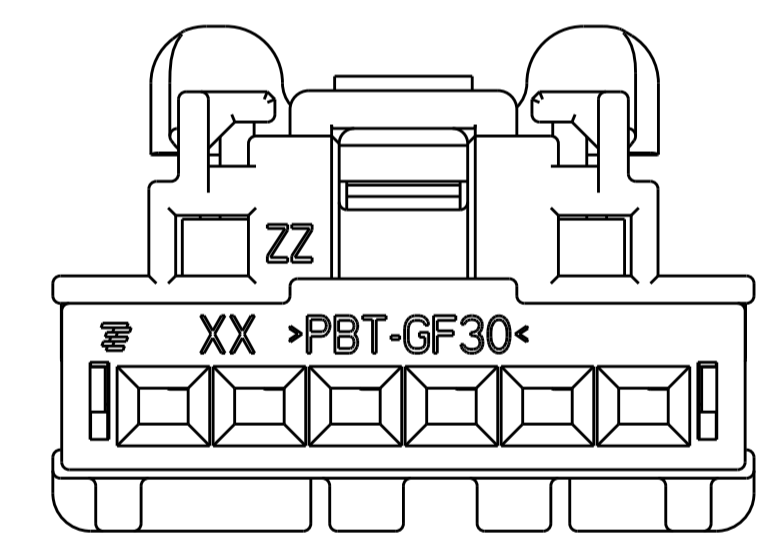

(SHOWN WITH CPA)

SCALE 2:1


KEYING OPTION E

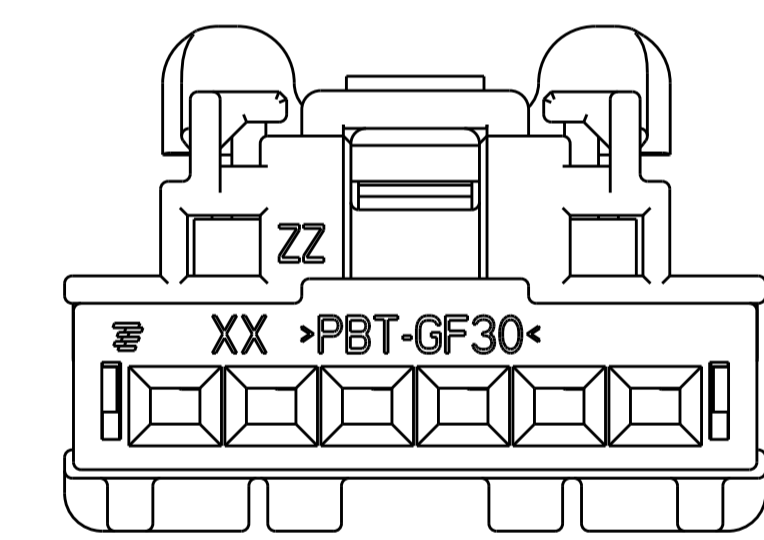

(SHOWN WITH CPA)




SCALE 2:1

KEYING OPTION F

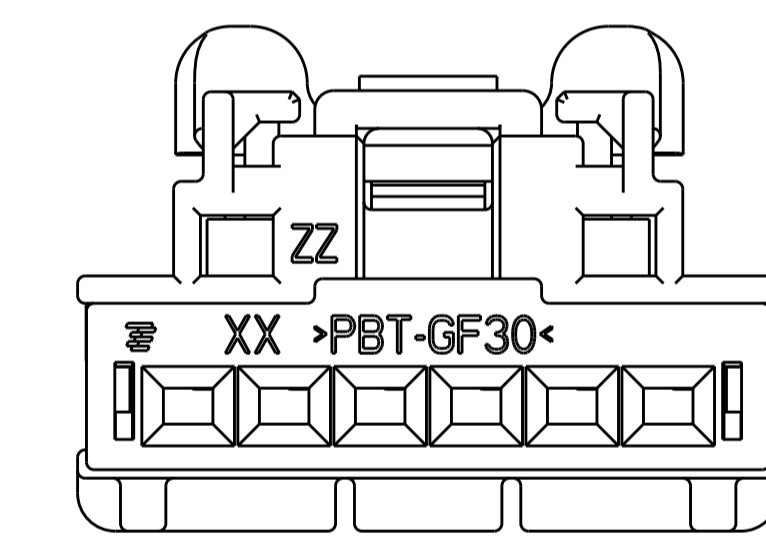

(SHOWN WITH CPA)

SCALE 2:1

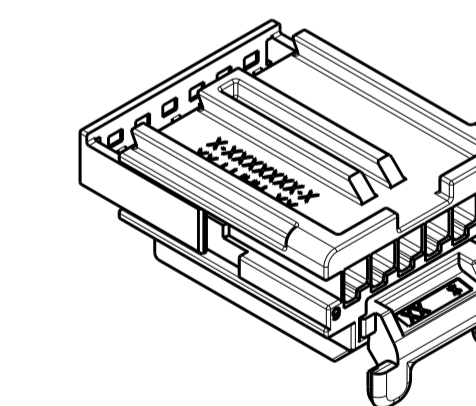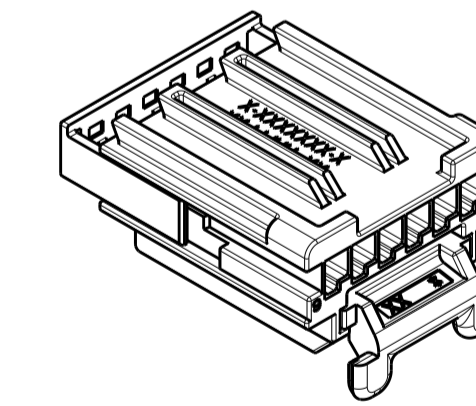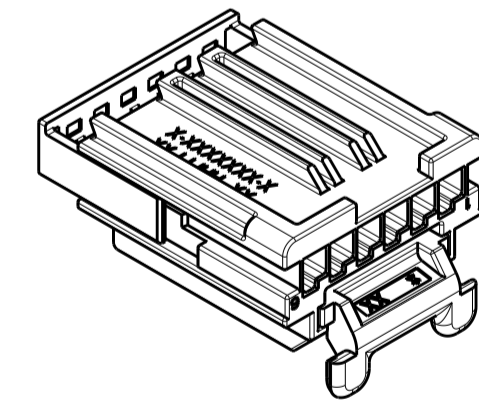

| | | | |
|--|---|---|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN: R. VESTAL 14DEC2006 CHK: D. STRAUSSER 14DEC2006 APVD: D. STRAUSSER 14DEC2006 | TE Connectivity |
| DIMENSIONS: mm | TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± | NAME: ASSEMBLY, 1X6 POSITION, GET, FEMALE, UNSEALED SIZE: A1 CAGE CODE: 100779 DRAWING NO: C=1456985 | |
| MATERIAL: SEE TABLE | FINISH: - | WEIGHT: - | RESTRICTED TO: - CUSTOMER DRAWING SCALE: 5:1 SHEET 2 OF 2 REV: D.3 |