

Ratings

Voltage: 300 V
 Temperature: -20 ~ 80 °C

Conductor

Gauge: 26 AWG
 Material: tinned copper strands
 Strand size: Ø 0.16 mm
 Strand count: 7

Insulator

Material: PVC, 80 °C
 Color: white
 Nominal thickness: 0.38 mm
 Outer diameter: 1.35 ±0.10 mm

Shield

Type: spiral
 Material: tinned copper strands
 Strand size: Ø 0.10 mm
 Strand count: 42


Outer jacket

Material: PVC, 80 °C
 Color: black
 Thickness: 0.38 mm
 Diameter: 2.45 ±0.10 mm
 Durometer: 79 Shore A

Wire marking: E339579 AWM STYLE 1185 26AWG 80°C 300V VW-1 --- C AWM I A 80°C 300V FT1 TENSILITY HLE

Tests

Voltage test: 300 V
 Spark test: 3.0/4.0 kV
 Max resistance at 20 °C: 150 ohm/km
 Tensile strength: 1.05 kgf/mm²
 After aging at 113 ±2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ±1 °C /1 hour, no observed degradation
 Deformation: 121 ±1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ±1 °C /1 hour, no observed cracking
 Flammability: VW-1
 Dielectric test: 2000 V ac for 1 minute without breakdown

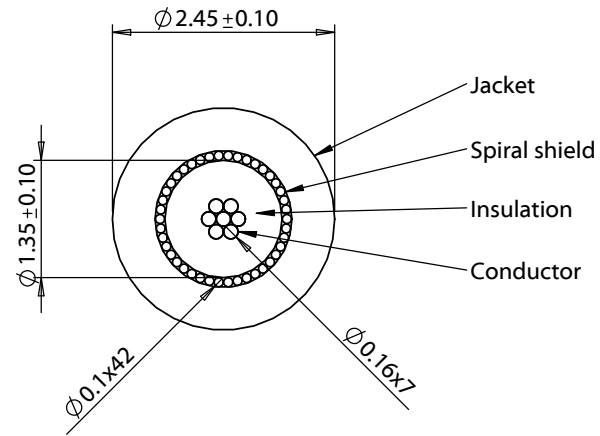

REVISION	DATE	DESCRIPTION
A	06/24/2014	Initial release

PREPARED:
 VERIFIED:
 DIMENSIONS ARE IN MILLIMETERS
 TOLERANCES:
 X: ± 0.5 mm
 X.X: ± 0.3 mm
 X.XX: ± 0.05 mm

NOTES:
 RoHS and REACH compliant
 Electrical test: no open, no short circuit, no intermittent
 DESCRIPTION:
 Wire, 1C TS, 26 AWG, UL1185, 300V, 80C, 2.45 mm, shielded, VW-1, PVC, 79A

TENSILITY
 20802 Sockeye Place #130
 Bend, OR 97701 USA
 tel 541.323.3228 fax 541.323.4202
 800 877.670.7118 www.tensility.com

SIZE A	PART NUMBER 30-00347	
SCALE: 12:1	WEIGHT:	SHEET 1 OF 1