


RECOMMENDED LAND PATTERN

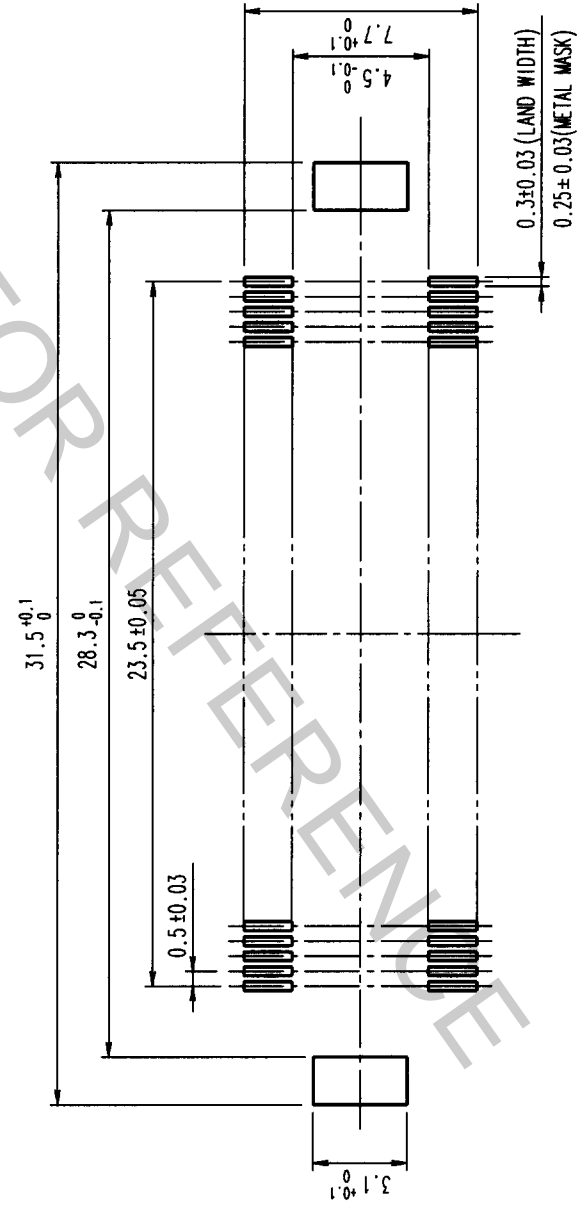

NOTES

- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
- 2 THIS PRODUCT HAS NO POLARITY TO MOUNT ON THE RECOMMENDED LAND PATTERN.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
3	PHOSPHOR BRONZE	TIN PLATED	1	LCP	BEIGE UL94V-0
2	PHOSPHOR BRONZE	CONTACT AREA: GOLD (0.1μm) OVER NICKEL LEAD: GOLD PLATED (FLASH) OVER NICKEL			

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
1	LCP	BEIGE UL94V-0	1	LCP	BEIGE UL94V-0
2	PHOSPHOR BRONZE	CONTACT AREA: GOLD (0.1μm) OVER NICKEL LEAD: GOLD PLATED (FLASH) OVER NICKEL	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD (0.1μm) OVER NICKEL LEAD: GOLD PLATED (FLASH) OVER NICKEL
3	PHOSPHOR BRONZE	TIN PLATED	3	PHOSPHOR BRONZE	TIN PLATED

TO	
PCK	

SCALE	4 : 1
UNITS	ITM
DRAWING NO.	EDC3-151988
PART NO.	FX10B-96S-SV
CODE NO.	CL570-0251-2

DESIGNED	J. Sakada	99.10.18
CHECKED	M. Sakabe	99.10.18
APPROVED	T. Yoshimura	99.10.18
RELEASED		