PB 1011 Test Jack, PCB Mounting, Ø 2 mm, 10 A







Approvals and Compliances

Description

- PCB Mounting
- Test Jack , diameter 2.0 mm
- measuring and testing during operation
- Continuous electrical connection
- Resilient contacts, gold plated

Weblinks

pdf datasheet, html-datasheet, General Product Information, Distributor-Stock-Check, Accessories, Detailed request for product

Technical Data

Diameter	2mm
Rated current	10A
Admissible switching power	
	220 W / max. 5 A or 75 VDC
	440 W / max. 5 A or 50 VAC
Contact resistance	$< 7\text{m}\Omega$ at 20 mV
Allowable Operation Tempe-	-25°C to 70°C
rature	

Solderability	235°C / 2 sec acc. to IEC 60068-2-	
	20, Test Ta, method 1	
Resistance to Soldering Heat	260°C / 5 sec acc. to IEC 60068-2-	
	20 , Test Tb, method 1A	
Weight	0.5 g	
Material: Housing	Thermoplastic (PC), UL 94V-2	
Surface of contacts	gold plated , Thickness 0.5 µm	

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

Application standards

Application standards where the product can be used


Organization	Design	Standard	Description
<u>IEC</u>	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technologyequipment.

Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
RoHS	RoHS	SCHURTER AG	EU Directive RoHS 2011/65/EU
©	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Dimensions [mm]

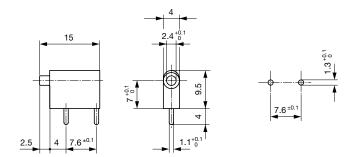

Diagrams



All Variants

Product group	Color	Order Number
Test Jack	black	0040.1011
Test Jack	red	0040.1012
Test Jack	blue	0040.1014

Most Popular.

Availability for all products can be searched real-time:https://www.schurter. com/en/Stock-Check/Stock-Check-SCHURTER

100 Pcs Packaging unit

Mating Inlets/Plugs

Category / Description



Test Jacks & Probes Overview complete

PS 1061 Test Probe, Ø 2 mm, 10 A

Test Jacks & Probes further types to PB 1011

PS 1061

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each

product selected for their own applications.